

World Headquarters

Johns Manville
717 17th Street
Denver, CO 80202 • USA
Phone: + 1 (303) 978-2000
www.im.com

Micro-Strand™ 100 and 200 Series Glass Microfibers



Description

Micro-Strand™ glass microfibers combine fine diameter with strength, consistency, and purity. They're the ideal choice for manufacturers of specialty glass paper or glass blends for use in ultra-high-purity air and liquid filtration. Micro-Strand's superior physical and chemical properties make it the best glass microfiber available. Johns Manville's newest technological advance, Micro-Strand CR™ was developed to reduce contamination from boron outgassing.

Uses

Micro-Strand is ideal for air and liquid filtration demanding the highest purity standards. An amorphous, exceptionally pure, fibrous silica material which is both low density and noncrystalline, Micro-Strand is furnished in bulk form for conversion to a wide variety of products. ASHRAE, HEPA, and ULPA filters are

manufactured from Micro-Strand glass fiber, due to its fine diameter fibers and outstanding fiber density. For battery applications, Micro-Strand offers extraordinary chemical resistance with excellent electrolyte suspension.

Micro-Strand glass paper withstands high operating pressures in both liquid and air filtration applications. Blends of Micro-Strand microfiber are used in automotive applications to improve air, oil, and hydraulic fluid filtration, allowing improved engine performance and life. Micro-Strand CR is appropriate for clean room filters in the electronics industry, especially for chip manufacturing facilities.

Advantages

Micro-Strand glass fibers are produced with advanced process technology for a variety of advantages:

- The finest diameter and optimum fiber length in the industry
- Chemically-specific formulations for end-use compatibility
- Easy to disperse in both binder and binder-free applications
- Small media pore size for ultra-pure filtration applications
- Allows glass paper to be produced with superior fiber density, surface area, and tensile strength
- Long fiber for excellent entanglement and increased product tensile strength
- Exceptionally consistent to run smoothly on customer manufacturing lines.

The physical (or chemical) properties of Johns Manville products represent typical average values obtained in accordance with accepted test methods at the time of manufacture and are subject to normal manufacturing variations. They are supplied as a technical service and should not be construed as guaranteeing specific properties of the products described or their suitability for a particular application and are subject to change without notice. Check the Johns Manville office to assure current information. For a copy of the Johns Manville Terms and Conditions of sale including the Limited Warranty and Limitation of Remedy or other product information, contact your local Johns Manville Representative.

CUSTOMER SERVICE:

USA

Johns Manville
7500 Dutch Road
Waterville, OH 43566 • USA
Phone: + 1800-554-4826
Fax: + 1-419-878-1110

EUROPE

Johns Manville Sales GmbH
Max-Fischer-Str. 11
86399 Bobingen • Germany
Phone: + 49 (0) 8234/9670-561
Fax: + 49 (0) 8234/9670-558

ASIA

JM Shanghai Nonwovens Co. Ltd.
No. 153 Huaying Road
Qingpu, Shanghai 201700 • P.R. China
Phone: +86 (21) 59728383 Ext. 804, 858
Fax: +86 (21) 59728116

January 2005

ISO 9001:2000

World Headquarters

Johns Manville
 717 17th Street
 Denver, CO 80202 • USA
 Phone: + 1 (303) 978-2000
www.im.com


Micro-Strand™ 100 and 200 Series Glass Microfibers

Micro-Strand Glass Microfibers – 100 Series


475 Chemical Composition	
Oxide	Nominal Wt. – %
SiO ₂	58.3
Al ₂ O ₃	5.8
B ₂ O ₃	11.3
Na ₂ O	10.1
K ₂ O	2.9
CaO	1.8
MgO	0.3
BaO	5.0
ZnO	4.0

Micro-Strand Glass Microfibers – 200 Series

253 Chemical Composition	
Oxide	Nominal Wt. – %
SiO ₂	65.5
Al ₂ O ₃	3.1
B ₂ O ₃	5.3
Na ₂ O	16.0
K ₂ O	0.7
CaO	5.9
MgO	3.0
BaO	0.01

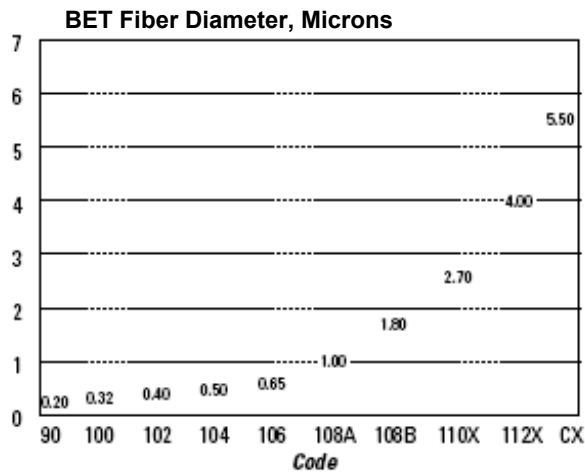

Surface Area = 1.54/diameter

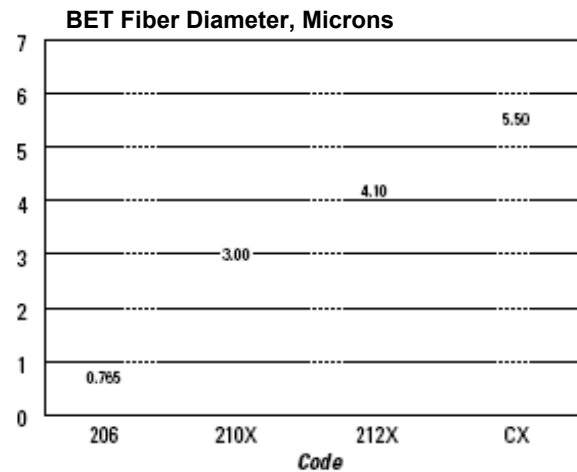

Surface Area = 1.59/diameter

The physical (or chemical) properties of Johns Manville products represent typical average values obtained in accordance with accepted test methods at the time of manufacture and are subject to normal manufacturing variations. They are supplied as a technical service and should not be construed as guaranteeing specific properties of the products described or their suitability for a particular application and are subject to change without notice. Check the Johns Manville office to assure current information. For a copy of the Johns Manville Terms and Conditions of sale including the Limited Warranty and Limitation of Remedy or other product information, contact your local Johns Manville Representative.

CUSTOMER SERVICE:**USA**

Johns Manville
 7500 Dutch Road
 Waterville, OH 43566 • USA
 Phone: + 1800-554-4826
 Fax: + 1-419-878-1110

EUROPE

Johns Manville Sales GmbH
 Max-Fischer-Str. 11
 86399 Bobingen • Germany
 Phone: + 49 (0) 8234/9670-561
 Fax: + 49 (0) 8234/9670-558

ASIA

JM Shanghai Nonwovens Co. Ltd.
 No. 153 Huaying Road
 Qingpu, Shanghai 201700 • P.R. China
 Phone: +86 (21) 59728383 Ext. 804, 858
 Fax: +86 (21) 59728116

January 2005

ISO 9001:2000