



## DESCRIPTION

JM's 4 X 1 Box Rib is designed with 1" high ribs on 4" centers, engineered for maximum structural stiffness. Stucco embossed is standard, for appearance. Aluminum thicknesses available are .032", .040", and .050". Box Rib is stocked in Alcad\*. Non-clad is available, but may extend lead time.

\* Alcad is aluminum which is produced by metallurgically bonding 7072 aluminum alloy to both sides of a 3004 alloy core. The resulting aluminum composition provides superior corrosion resistance.

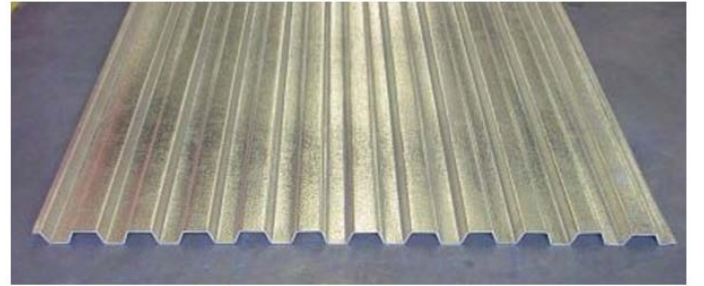

## FLASHING FLAT SHEETS

Available in ALCLAD and NON-CLAD in 0.032, 0.040, and 0.050.

Finish: Stucco Embossed

Alloy: 3004-7072 Alclad

Widths: 45<sup>5</sup>/<sub>8</sub>" (44" Coverage)

Lengths Stocked: 8', 10', 12', in 0.032 and 0.040

Available upon request:

Widths: 38<sup>1</sup>/<sub>2</sub>" and 27<sup>1</sup>/<sub>2</sub>"

Custom order lengths (including 0.050)

Non-clad and Stainless Steel

Pabco/Childers Metals



717 17th St.  
Denver, CO 80202  
(800) 231-1024  
JM.com

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Any references to numerical flame spread or smoke developed ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions. Check with the Regional Sales Office nearest you for current information.

**All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville thermal insulation and systems, visit [www.jm.com/terms-conditions](http://www.jm.com/terms-conditions) or call (800)654-3103.**