

DESCRIPTION

Whispertone® Tackboard is a fiberglass board made from highly resistant flame-attenuated glass fibers with mat facers on one or both surfaces. The top mat surface is smooth and uniform in color and provides a tackable surface for acoustical office furniture and wall panel applications. This product offers uniform thickness, rigidity, color and smoothness.

Whispertone Micromat insulation is specifically engineered for use in acoustical panel and office furniture applications that require an efficient sound-absorbing medium with uniform color and thickness. Additional qualities include ease of fabrication, high tensile strength and resilience, light weight and resistance to vibration and shakedown.

The high tensile strength, inherent in Whispertone Micromat blankets, helps the product resist damage during application. Because of their resiliency and flexibility, Whispertone Micromat blankets resist settling, breakdown, sagging from vibration and damage from impact.


Whispertone Micromat can be easily formed around corners and curved surfaces, and it is readily cut in die-cut presses or with a knife. The countless air spaces in Whispertone Micromat create effective sound absorption, as well as thermal properties.

STANDARD THICKNESSES AND DENSITIES

Core Density		Thickness	
pcf	kg/m ³	in	mm
1.8 - 2.0	29 - 32	¼ - 1.0	6 - 25

CUSTOM FABRICATION

The Johns Manville nationwide network of Approved Fabricators specializes in secondary processing to supply custom parts to meet specific customer requirements. Die-cutting, laminating, special packaging and just-in-time delivery are just a few of the multiple capabilities our fabricators can provide.

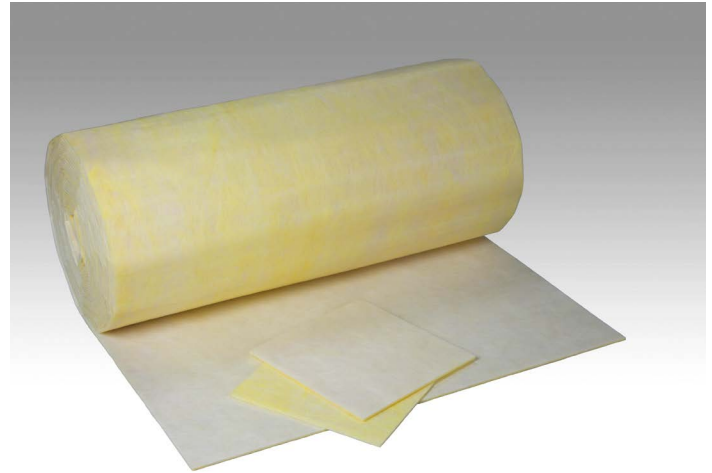

SPECIFICATIONS

Temperature Limit	250°F (121°C)
Fire Hazard Classification ASTM E84, UL 723, and CAN/ ULC S102-M88, Meets NFPA 90A and 90B	25 Flame Spread 50 Smoke Developed
Facings	Evalith™ fiberglass mat
Resistance to Microbial Growth	Meets ASTM C1338, G21 and G22 as required in ASTM C1071

APPLICATIONS

- Acoustical Panels
- Acoustical Partitions
- Other Acoustical Uses

ADVANTAGES

- Excellent Acoustical Performance
- High Tensile Strength
- Uniform Density Distribution
- Excellent Dimensional Uniformity
- Readily Fabricated

THERMAL CONDUCTIVITY

Density		Mean Temp. @ 75°F (24°C)	
lb/ft ³	kg/m ³	Btu•in/(hr•ft ² •°F)	W/m•°C
1.8	28.8	0.24	0.034
2.0	32.0	0.225	0.032

ACOUSTICAL PERFORMANCE

Type "A" Mounting Sound Absorption Coefficients*

Density		Thicknesses		Frequency (Hz)						
pcf	kg/m ³	in	mm	125	250	500	1000	2000	4000	NRC**
2.0	32	0.25	6.35	0.00	0.06	0.11	0.29	0.49	0.65	0.25
1.8	29	0.50	13	0.03	0.13	0.28	0.53	0.71	0.85	0.40
1.8	29	1.00	25	0.07	0.27	0.64	0.86	0.97	1.00	0.70

*Tested in accordance with ASTM C423, Type "A" mounting per ASTM E795.

**Noise reduction coefficient.



717 17th St.
Denver, CO 80202
(800) 654-3103
JM.com

**INSULATION SYSTEMS
OEM INSULATIONS**

OEM CUSTOMER SERVICE
800-426-2435

**PRODUCT & TECHNICAL
INFORMATION**

800-654-3103

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The physical and chemical properties of Whisperstone Micromat listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Any references to numerical flame spread or smoke developed ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville thermal insulation and systems, visit www2.jm.com/terms-conditions or call (800) 654-3103.