

Bulletin Number: M20-008


Date: August 6, 2020

Distribution: External

Johns Manville Announces DensDeck® StormX™ Prime Roof Board

Johns Manville is proud to announce DensDeck StormX Prime Roof Board, a 5/8" thick, heavy duty gypsum cover board achieving FM Very Severe Hail (VSH) approval in conjunction with adhered JM TPO 60 mil smooth back membrane. DensDeck StormX Prime Roof Board offers exceptional hail impact resistance in addition to all the familiar benefits associated with DensDeck gypsum cover boards including fire protection, moisture resistance and long-term dimensional stability. DensDeck StormX Prime Roof Board is the only gypsum cover board product to achieve FM VSH approval with 60 mil TPO membrane and standard membrane adhesives resulting in a cost effective, high performance solution to resist extreme hail impact.

JM 60 MIL TPO VERY SEVERE HAIL SYSTEM

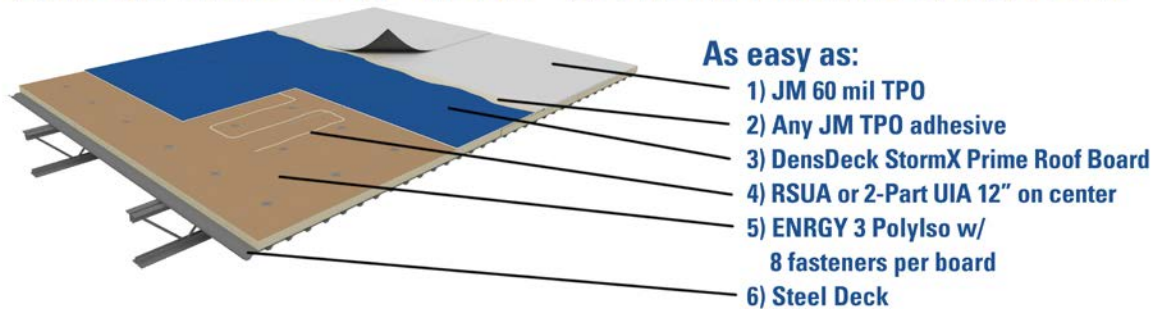

Product Overview:

SKU	Product	Thickness	Size	Boards per Pallet	Pallets per Truck*
70006777	DensDeck StormX Prime	5/8"	48" x 48"	34	27-28
70006778	DensDeck StormX Prime	5/8"	48" x 96"	26	18-19

*Number of units per truck may vary per shipping location and can be verified at time of order placement.

DensDeck StormX Prime Roof Board is manufactured in Fort Dodge, IA.

DensDeck StormX Prime Roof Board will be available for order fulfillment on September, 8th 2020.

Installation and Specification:

Installation of DensDeck StormX Prime Roof Board follows the same familiar guidelines as DensDeck Prime Roof Boards. Installation for compliance with VSH rated assemblies include 48"x48" DensDeck StormX Prime Roof Board adhered in 12" on center ribbons of 2PUIA or RSUA low rise foam adhesive with and adhered 60 mil JM TPO membrane. DensDeck StormX Prime Roof Board is eligible to be included in the JM Peak Advantage® Guarantee.

Contact your local sales representative to find out more about the system benefits with DensDeck StormX Prime Roof Board.

Matt Sayer
Boards Product Manager