


Features and Components

- Use:** To seal uneven penetrations through the membrane that are difficult to flash.
- Materials:** Uncured EPDM (ethylene propylene diene monomer) with a pressure sensitive seam tape around the bottom.
- Color:** Black

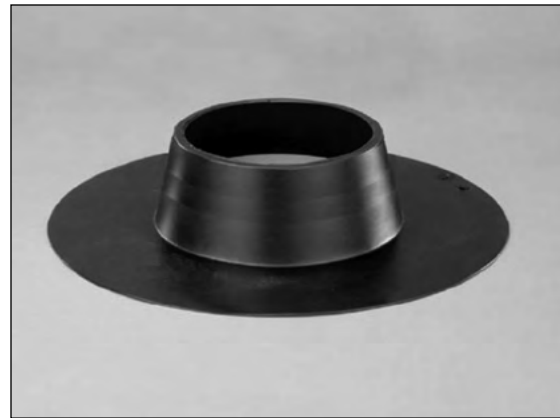

Component
A Accessory
Single Ply
Type
FP Penetration

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	SA	MF
<i>Do not use in Multi-Ply systems</i>									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Compatible with the selected Single Ply systems above</i>							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Physical Properties of the Butyl Tape*

Property	JM EPDM Peel & Stick Pourable Sealer Pockets
Tensile Strength	100 psi (690 kPa)
Peel Strength @ 70°F [21°C]	8 - 10 pli (1.43 - 1.79 kg/cm)
Shear Strength @ 70°F [21°C]	35 - 45 psi (241 - 310 kPa)

* The cured JM EPDM Peel & Stick Pourable Sealer Pockets meet or exceed the requirements of ASTM D 4811.

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

Installation/Application



Self-Adhered

- Prime EPDM membrane with JM Tape Primer or JM Tape Primer (Low VOC) before applying JM EPDM Peel & Stick Pourable Sealer Pockets.
- Do not install in direct contact with asphalt or coal tar pitch.
- Refer to JM EPDM applicator guides or detail drawings for instructions.

Packaging and Dimensions

Size	6" (15.2 cm) diameter
Thickness: Membrane	0.060" (1.52 mm)
Tape	0.030" (0.76 mm)
Total	0.090" (2.28 mm)
Pockets per Box	12
Weight per Box	9.2 lb (4.2 kg)

Storage

Shelf Life	12 months from manufacture date
Storage Conditions	Store indoors, out of direct sunlight, keep clean and dry prior to use.
Temperature Range	60°F – 80°F (16°C – 27°C)