

Meets the requirements of ASTM D 6163, Type 1, Grade G


Features and Components

DynaGlas 30 FR is used as a fiber glass-reinforced mineral-surfaced cap sheet in a variety of multi-ply roofing systems.

Ceramic-Coated Roofing Granules: Specifically engineered for optimal embedment in the SBS-blend sheet. The ceramic coating promotes excellent long-term adhesion.

High-Quality SBS Rubber and Asphalt Blend: Lends elasticity and flexibility to the sheet. The elongation and recovery properties allow the product to easily accommodate the continual expansion and contraction experienced on all roofs. The FR blend contains additional fire-retardant additives.

Fiber Glass Reinforcement Mat: Offers excellent dimensional stability and tensile strength and withstands differential movement. Because it has no thermal memory less time is needed to relax the sheet, allowing for ease of installation. The fiber glass mat also has good lay-flat characteristics.

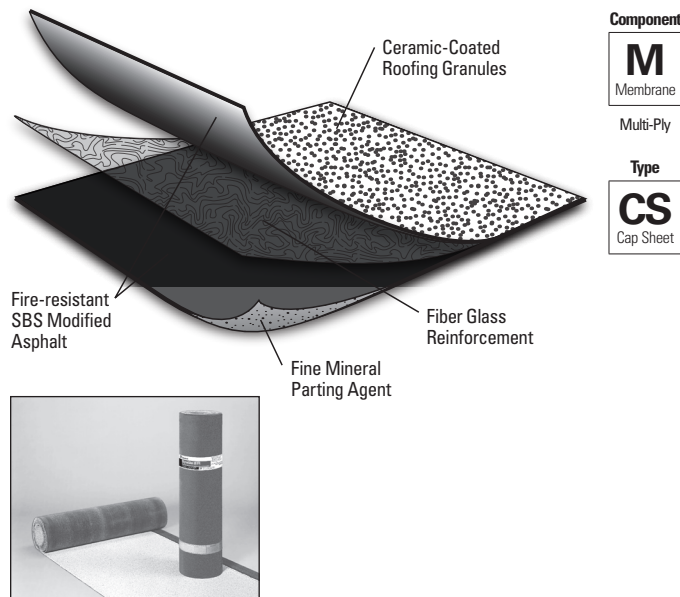

Component
M Membrane
Multi-Ply
Type
CS Cap Sheet

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA

Compatible with the selected Multi-Ply systems above

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA

Do not use with Single Ply systems

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Test	Initial	3-Year Aged
Reflectivity* (ASTM C 1549)	0.26	0.27
Emissivity* (ASTM C 1371)	0.87	0.84
Solar Reflectance Index* (SRI) - E 1980	25	25
Pre-Consumer Recycled Content	0%	
Post-Consumer Recycled Content	0%	

*Standard White Granule only

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements or guarantee terms.

Codes and Approvals



Product Application



- May be installed in Type IV asphalt or in an approved JM adhesive
- Laps may be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

Packaging and Dimensions

Roll Coverage*	95.8 ft ² (8.9 m ²)
Roll Length	32' 10" (10.01 m)
Roll Width	39 3/8" (1 m)
Roll Weight	95 lb (43.1 kg)
Rolls per Pallet	20
Pallet Weight	2,030 lb (921 kg)
Pallets per Truck**	22

*Assumes a 4' side lap **Assumes 48' flatbed truck.

Meets the requirements of ASTM D 6163, Type 1, Grade G

Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6163, Type 1, Grade G (Min.)	DynaGlas 30 FR	
				MD*	XMD**
Strength	Tensile Tear	D 5147	35 lbf (156 N)	100 lbf (445 N)	90 lbf (400 N)
	Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12.3 kN/m)	130 lbf/in (22.8 kN/m)	100 lbf/in (17.5 kN/m)
	Peak Load at 73.4°F (23°C)	D 5147	30 lbf/in (5.3 kN/m)	70 lbf/in (12.3 kN/m)	50 lbf/in (8.8 kN/m)
Longevity	Low Temp. Flexibility	Unconditioned	D 5147	0°F (-18°C)	-10°F (-23°C)
		90-Day Heat Conditioned	D 5147	0°F (-18°C)	-10°F (-23°C)
	Compound Stability	D 5147	215°F (102°C)	250°F (121°C)	
	Granule Loss	D 4977	2 g (0.07 oz)	0.7 g (0.02 oz)	
	Thickness	D 5147	95 mil (2.4 mm)	142 mil (3.6 mm)	
	Selvage Edge Thickness	D 5147	N/A	118 mil (3.0 mm)	
	Elongation at Peak Load at 0°F (-18°C)	D 5147	1%	5%	5%
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	2%	4%	4%
	Ultimate Elongation at 73.4°F (23°C)	D 5147	3%	50%	55%
Aged Performance	90-Day Heat-Conditioned Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12.3 kN/m)	135 lbf/in (23.6 kN/m)	100 lbf/in (17.5 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 0°F (-18°C)	D 5147	1%	5%	4%
	90-Day Heat-Conditioned Peak Load at 73.4°F (23°C)	D 5147	30 lbf/in (5.3 kN/m)	100 lbf/in (17.5 kN/m)	75 lbf/in (13.1 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 73.4°F (23°C)	D 5147	2%	4%	4%
	90-Day Heat-Conditioned Ultimate Elongation at 73.4°F (23°C)	D 5147	3%	5%	6%
Installation	Dimensional Stability	D 5147	0.5%	0.1%	0.1%
	Net Mass per Unit Area	D 146	65 lb/100 ft² (30 kg/9.29 m²)	89 lb/100 ft² (40.4 kg/9.29 m²)	
	Roll Weight	D 146	N/A	95 lb (43.1 kg)	

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: All data represents tested values.

Supplemental Testing

Physical Properties		ASTM Test Method	DynaGlas 30 FR Result
Cyclic Joint Displacement	Initial	D 5849	Pass at 500 cycles*
	After 90-Day Heat Conditioning per ASTM D 5147	D 5849	Pass at 200 cycles*
Coefficient of Friction	Static	D 1894	1.32
	Kinetic	D 1894	0.89

*In a min 2-ply system when adhered with any combination of cold applied, hot applied and or heat-weld that is approved by JM for application.