

Meets the requirements of ASTM D 6162, Type I, Grade G

### Features and Components


DynaKap FR T1 HW is used as a premium fiber glass/polyester-reinforced mineral-surfaced cap sheet in a variety of multi-ply roofing systems.

**Ceramic-Coated Roofing Granules:** Specifically engineered for optimal embedment in the SBS-blend sheet. The ceramic coating promotes excellent long-term adhesion. Granules are available in White or Black.

**High-Quality SBS Rubber and Asphalt Blend:** Lends elasticity and flexibility to the sheet. The elongation and recovery properties allow the product to easily accommodate the continual expansion and contraction experienced on all roofs. The FR blend contains additional fire-retardant additives.

**Fiber Glass/Polyester Reinforcement Mat:** Combines the excellent tensile strength, toughness and puncture resistance of a polyester mat with the dimensional stability and lay-flat characteristics of fiber glass.

**Polyolefin Burn-Off Film:** Promotes ease of heat welding.

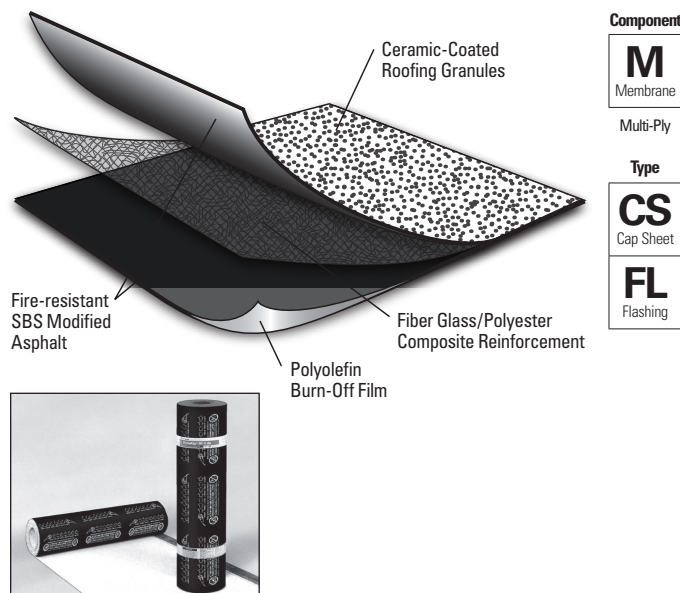

Colors: White

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	HW	HA	CA	HW	SA	MF	
Compatible with the selected multi-ply systems above									

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Compatible with the selected single ply systems above										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

### Energy and the Environment

Test	Initial	3-Year Aged
Reflectivity* (ASTM C 1549)	0.28	0.25
Emissivity* (ASTM C 1371)	0.89	0.92
Solar Reflectance Index* (SRI) - E 1980	29	26
Pre-Consumer Recycled Content	0%	
Post-Consumer Recycled Content	0%	

\*Standard White Granule only

### Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

\*Contact JM Technical Services for specific system requirements or guarantee terms.

### Codes and Approvals



### Installation/Application



Heat Weld

- Must be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

### Packaging and Dimensions

Roll Coverage*	95.8 ft <sup>2</sup> (8.9 m <sup>2</sup> )
Roll Length	32' 10" (10 m)
Roll Width	39 3/8" (1 m)
Roll Weight	105 lb (47.6 kg)
Rolls per Pallet	20
Pallet Weight	2,430 lb (1,102 kg)
Pallets per Truck**	20
Producing Locations	South Gate, CA Macon, GA Plattsburgh, NY

\*Assumes a 4" side lap \*\*Assumes 48' flatbed truck.

Meets the requirements of ASTM D 6162, Type I, Grade G

## Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6162, Type I, Grade G (Min.)	DynaKap FR T1 HW	
				MD*	XMD**
Strength	Tensile Tear	D 5147	65 lbf (289 N)	165 lbf (734 N)	160 lbf (712 N)
	Peak Load at 0°F (-18°C)	D 5147	75 lbf/in (13.1 kN/m)	190 lbf/in (33.3 kN/m)	170 lbf/in (29.8 kN/m)
	Peak Load at 73.4°F (23°C)	D 5147	75 lbf/in (13.1 kN/m)	120 lbf/in (21 kN/m)	100 lbf/in (17.5 kN/m)
Longevity	Low Temp. Flexibility	Unconditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
		90-Day Heat Conditioned	D 5147	0°F (-18°C)	-15°F (-26°C)
	Compound Stability	D 5147	195°F (91°C)	250°F (121°C)	
	Granule Loss	D 4977	2 g (0.07 oz)	0.7 g (0.02 oz)	
	Thickness	D 5147	110 mil (2.8 mm)	157 mil (4.0 mm)	
	Selvage Edge Thickness	D 5147	N/A	119 mil (3.0 mm)	
	Elongation at Peak Load at 0°F (-18°C)	D 5147	1%	5%	5%
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	2%	6%	6%
	Ultimate Elongation at 73.4°F (23°C)	D 5147	26%	40%	40%
Aged Performance	90-Day Heat-Conditioned Peak Load at 0°F (-18°C)	D 5147	75 lbf/in (13.1 kN/m)	190 lbf/in (33.3 kN/m)	170 lbf/in (29.8 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 0°F (-18°C)	D 5147	1%	5%	5%
	90-Day Heat-Conditioned Peak Load at 73.4°F (23°C)	D 5147	75 lbf/in (13.1 kN/m)	165 lbf/in (28.9 kN/m)	145 lbf/in (25.4 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 73.4°F (23°C)	D 5147	2%	5%	5%
	90-Day Heat-Conditioned Ultimate Elongation at 73.4°F (23°C)	D 5147	9%	9%	9%
Installation	Dimensional Stability	D 5147	0.5%	0.2%	0.2%
	Net Mass per Unit Area	D 146	60 lb/100 ft <sup>2</sup> (27.2 kg/9.29 m <sup>2</sup> )	100 lb/100 ft <sup>2</sup> (45.4 kg/9.29 m <sup>2</sup> )	
	Roll Weight	D 146	N/A	105 lb (47.6 kg)	

\*MD = Machine Direction

\*\*XMD = Cross-Machine Direction

Note: All data represents tested values.

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at [www.jm.com/](http://www.jm.com/) roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit [www.jm.com/terms-conditions](http://www.jm.com/terms-conditions).