

### Three-Ply Hot Mopped Modified Bitumen Mineral-Surfaced Roofing System. For use over approved lightweight, insulating fill decks on inclines up to 3" per ft (250 mm/m).

Materials per 100 ft<sup>2</sup> (9.29 m<sup>2</sup>) of roof area

#### Felts:

Base: Ventsulation Felt, GlasBase Plus, DynaBase or PermaPly 28 1 layer  
 Intermediate: DynaBase, DynaPly T1, GlasBase Plus,  
 GlasPly Premier, GlasPly IV, PermaPly 28 or DynaLastic 180 S 1 layer

**Note:** DynaBase, DynaLastic 180 S and DynaPly T1 – Full Sheet width is 39½" (1 m)  
 GlasBase Plus, GlasPly IV, GlasPly Premier, PermaPly 28 and Ventsulation Felt – Full Sheet width is 36" (0.92 m)

#### Cap: ♦

3CLD—DynaKap T1 or DynaKap FR T1  
 3FLD—DynaGlas, DynaGlas FR or DynaGlas 30 FR\*  
 3PLD—DynaLastic 180, DynaLastic 180 FR, DynaLastic 250 or  
 DynaLastic 250 FR 1 layer

\* DynaGlas 30 FR must be used in conjunction with DynaBase, DynaPly T1 or DynaLastic 180 S only.

**Asphalt:** Trumbull®\* or other JM-approved asphalt

Incline per foot	Asphalt	Total Weight
Up to ½" (41 mm/m)	190°F (88°C), Type III, Steep	46 lb (21 kg)
½" to 3" (41 to 250 mm/m)	220°F (104°C), Type IV, Special Steep	46 lb (21 kg)

Approximate installed weight: 165 - 360 lb (75 - 163 kg).

#### General

This specification is for use over any type of approved, lightweight, insulating fill deck (without insulation) which can receive and adequately retain mechanical fasteners that may be recommended by the deck manufacturer. Examples of these decks are lightweight, insulating concrete, either cellular-type or aggregate-type. Ventsulation venting base felt is recommended over any wet fill deck, and may be required as a condition of guarantee. JM also recommends the use of FP-10 One-Way Roof Vents over some types of wet fill decks.

**Design and installation of the deck and/or roof substrate must result in the roof draining freely, to outlets numerous enough and so located as to remove water promptly and completely. Areas where water ponds for more than 24 hours are unacceptable and will not be eligible for a JM Peak Advantage Guarantee.**

**Note:** All general instructions contained in the current JM Commercial/Industrial Roofing Systems Manual shall be considered part of this specification.


#### Flashings

Flashing details can be found in Section 3 of the JM Commercial/Industrial Roofing Systems Manual.

#### Application

On roof decks with slopes up to ½" per ft (41 mm/m), the roofing felts and modified bitumen sheets may be installed either perpendicular or parallel to the roof incline.

Using one of the base felts listed, start with a piece ¾ sheet wide. The remaining felts are to be applied full width with 3" (76 mm) side and 4" (102 mm) end laps over the preceding sheets. Nail the laps at 9" (229 mm) centers, and down the longitudinal center of each felt place two rows of nails, with the rows spaced approximately 11" (279 mm) apart, and nails staggered on approximately 18" (457 mm) centers. Use nails or fasteners appropriate to the type of deck, with 1" (25 mm) minimum diameter caps. Consult the current FM Approvals<sup>SM</sup> RoofNav for the appropriate

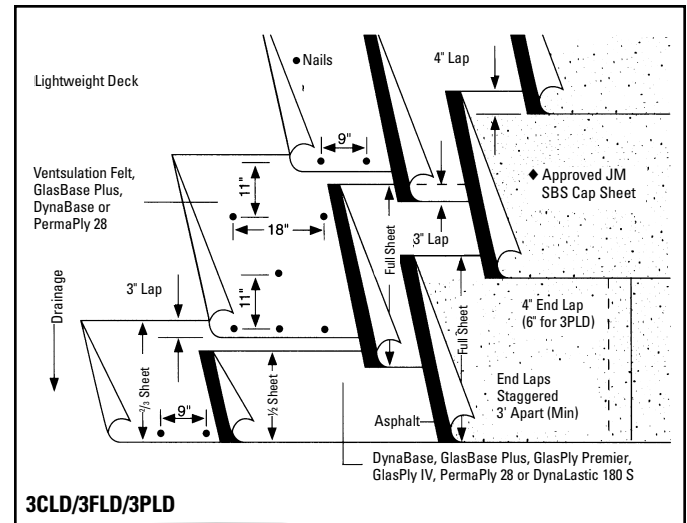

base sheet, fastener type and pattern. For additional fastener information, refer to the "Roof Decks" section of the current JM Commercial/Industrial Roofing Systems Manual.

Roll an ½ width piece of one of the intermediate felts listed into a full mopping of asphalt. The remaining felts are to be applied full width, in the same manner, with 3" (76 mm) side and 4" (102 mm) end laps over the preceding sheets.

Apply a full width piece of one of the cap sheets listed into a full mopping of asphalt. Subsequent sheets are to be applied in the same manner, with 4" (102 mm) side and end laps over the preceding sheets (6" [152 mm] end laps for DynaLastic products).

Apply all felts so that they are firmly and uniformly set, without voids, into the hot asphalt. Asphalt temperature should be at the Equiviscous Temperature (EVT), ±25°F (±14°C), at the point of application. All felt edges shall be well sealed. The asphalt shall be applied just before the felt, at a nominal rate of 23 lb/100 ft<sup>2</sup> (11 kg/9.29 m<sup>2</sup>). For modified bitumen sheets, the asphalt temperature shall be at a minimum of 400°F (204°C) when the sheet is set into it. This higher temperature maximizes the bonding of the modified bitumen sheet.

**Note:** When using metric- and English-sized base and cap sheets in the same system, care must be taken to avoid lap-over-lap configurations.

For cold weather application techniques, refer to Paragraph 24.0 of Section 3d.

**Base sheets and cap sheets with polyester reinforcement must be allowed to relax in an unrolled position prior to installation.**

#### Steep Slope Requirements

Special procedures are required on inclines over ½" per foot (41 mm/m). Refer to Paragraph 21.0 of Section 3d.

#### Surfacing

No additional surfacing is required.

#### Asphalt

Asphalt should meet the requirements of ASTM D 312. JM guarantees require the use of Trumbull®\* asphalt or another JM-approved asphalt.

**Note:** For the most current information on general guidelines, please refer to the System Considerations tab under Systems Introduction & Selection on the JM Roofing Web site. For specifications, flashing details and general installation information please refer to the System Application tab.

\* Trumbull is a registered trademark of Owens Corning.

Refer to the Material Safety Data Sheet and product label prior to using this product.